

Marely Security Camera (Wi-Fi®)

SSC010



Features

- Wi-Fi® (No hub required)
- Freestanding or wall/ceiling mountable
- Detects motion/sound (with notification option)
- Pan and tilt function with motion tracking
- 1-way or 2-way audio
- Infrared night vision
- Built-in Siren, Adjustable Volume and Duration
- Adjustable Activity area, and human filter
- 5V USB adapter & cable supplied
- Streaming available 24/7 on demand via the app
- Rolling storage - no need to maintain SD card's storage capacity
- 3-year warranty

Network/Device Requirements

Connectivity	Wi-Fi®
Requirements	Existing 2.4GHz Wi-Fi® network
Protocol	IEEE 802.11 b/g/n
Wireless Frequency	2.4GHz
App Requirements	Mobile device running iOS or Android. (Refer to ikuu.com.au for minimum specs)

Technical Specifications


Supply Voltage	5V DC (adapter supplied)
Power Consumption	5W
IP Rating	IP20 (indoor use only)
Colour	White
Housing Material	Polycarbonate & ABS
Weight	180g
Dimensions (H x Diam)	117mm x 75mm
Power Port	Micro USB
Power Cable (supplied)	Type-A to Micro USB (male-male)
Detection Distance	up to 8m ⁽¹⁾
Pan & Tilt Range	Horizontal: 350°, Vertical: 80°
Field of View	100°
Video Resolution	1296p HD
Supported Memory (16GB supplied)	Requires class 10 micro-SD card (max 256GB)
Audio	1-way or 2-way audio
Night Vision	IR, up to 10m vision ⁽¹⁾
Recording Method	Continuous or event recording

⁽¹⁾Varies depending on the mounting location and temperature



Included Accessories

Micro USB charging cable, USB power adaptor, Mounting bracket, Mounting screws, Wall plugs.

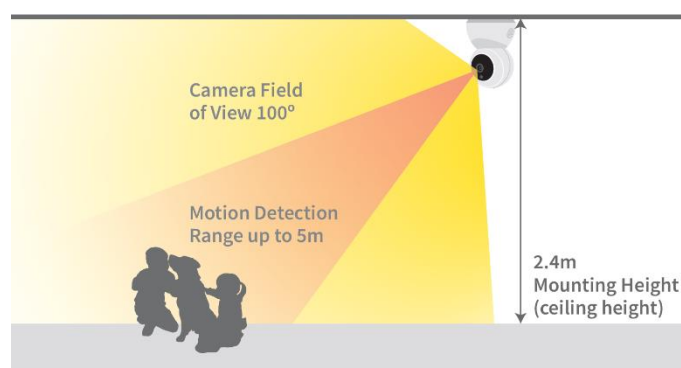

This product is valid for 3 years warranty from the date of purchase. Please retain proof of purchase and contact our customer service team to make a claim. Please visit <https://www.mercator.com.au/product-support/warranty> for more information. For Mercator Ikuu contractor or end consumer support please visit www.ikuu.com.au or contact our customer service team on 1300 552 255 or via email at customercare@mercator.com.au

*Download the app using the QR code or visit the iOS or Google Play store.

www.ikuu.com.au






Mounting Instructions

Before choosing preferred location, check Wi-Fi strength/coverage is adequate.

CEILING MOUNT

1. Using the mounting bracket as a template, mark the screw positions on the ceiling.
2. Drill holes into the ceiling and push the wall plugs into the holes.
3. Use the mounting screws to install the mounting bracket to the ceiling.
4. Attach the camera to the mounting bracket and tighten the knob screw to secure the camera.

NOTE: To get the correct orientation for ceiling mount, navigate to settings > basic function settings > flip screen.

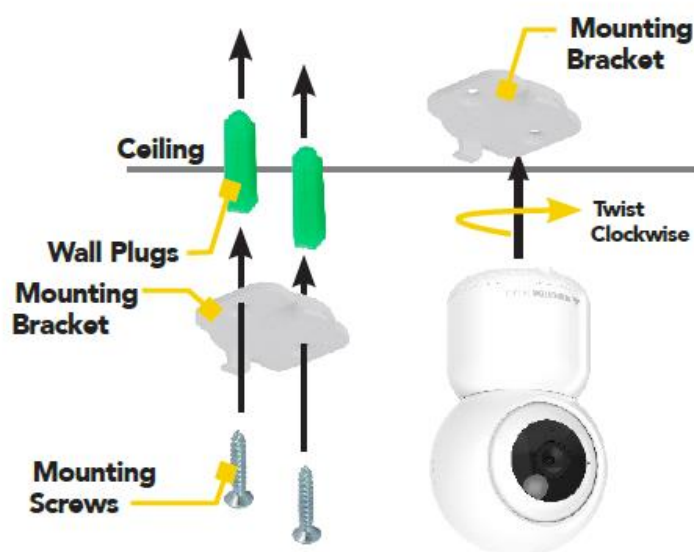

This product is valid for 3 years warranty from the date of purchase. Please retain proof of purchase and contact our customer service team to make a claim. Please visit <https://www.mercator.com.au/product-support/warranty> for more information. For Mercator Ikuu contractor or end consumer support please visit www.ikuu.com.au or contact our customer service team on 1300 552 255 or via email at customercare@mercator.com.au

*Download the app using the QR code or visit the iOS or Google Play store.

www.ikuu.com.au

