



SMART SECURITY CAMERA

QUICK START GUIDE





Introduction

This smart security camera is designed for use in homes, apartments, offices, garages and sheds. It's easy to set up and operate, giving you and your family the security and peace of mind that you deserve.

You can monitor your camera remotely through the Mercator Ikuü app, which can be downloaded for free from the Apple App Store and Google Play Store.

Contents

- 1 x Smart Indoor Security Camera
- 1 x Power Adaptor
- 3 x Mounting Screws and Wall Plugs
- 1 x Mounting Bracket
- 1 x USB-C Charging cable



Identification

Camera Lens
2K 2304 x 1296p (3MP), with 130° field of view (diagonal)

Microphone

White LED Light
Applied for Colour Night Vision LED feature

Status Light
· Blinking red light: wait for network connection
· Solid blue light on: camera is working correctly
· Solid red light on: camera lost connection

IR Light

Charging Indicator
Solid red light: battery is charging
Solid blue light: charging completed

Motion Sensor
PIR motion detection sensor

Micro SD card slot
Use a micro SD memory card to record video 24/7 (Support up to 128GB micro SD card)

Power Port
Connect adaptor to a standard power outlet and connect to the camera using the provided USB-C cable

Reset Button
Hold for 5 seconds to reboot and clear all settings to factory defaults. This will allow you to connect with a different Wi-Fi network if required.

ON/OFF Button
Hold for 3 seconds to switch ON/OFF the device

Set Up the App

1. Download the Mercator Ikuü app.
2. Tap 'create new account' or 'log in to account'.
3. Follow the in-app prompts and tap 'OK'.

Connect Your Camera to the App


1


Log in to the Mercator Ikuü app.



Note: Ensure your camera is in pairing mode. The LED should be flashing red. If it isn't, press and hold the reset button on the back of the unit for 5 seconds and wait for the camera to restart.

2


Tap the  icon and select 'Add Device'.

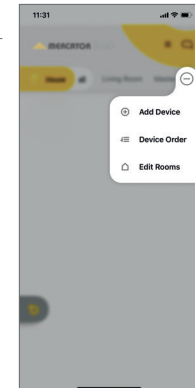

Connect Your Camera to the App (Cont.)


3

Select 'Cameras' from the sidebar, and then tap the Battery Camera icon.




4

Please press and hold the reset button for 5s to reset the camera, make sure the indicator is flashing red then tap 'next step'.

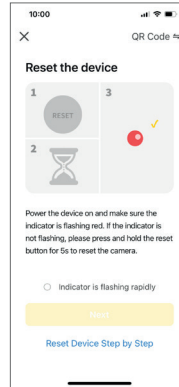


7

The app will begin adding the device and pairing the camera.

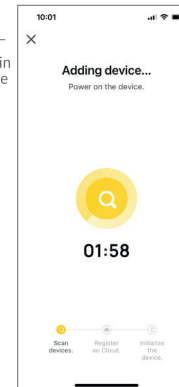


8

When the device is added successfully, update the name of the device and then tap 'Done'.

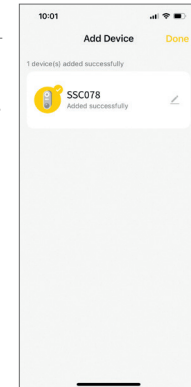


5

Enter your Wi-Fi name and password, then tap 'Confirm'.

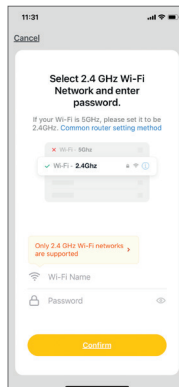


6

Place the camera eye over the QR code to scan (holding the camera 15cm away from your device screen). When you hear the prompt, tap 'I Heard a Prompt'.

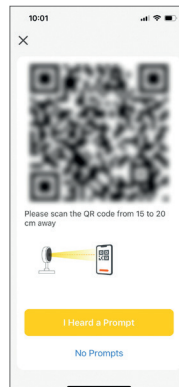





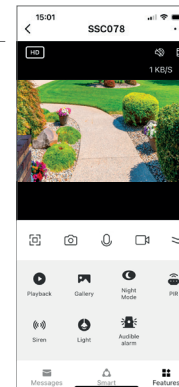





9

The camera feed will open, and you will be prompted to allow access to your device's microphone. Tap 'OK' to continue. Your camera is now connected and ready for use.





Camera Functions

 Screenshot	Take a photo of the live video feed, which will be saved to the photo album.	 Light	Manually light control the light ON/OFF.
 Speak	Speak through the camera speaker via your phone microphone.	 Gallery	View previously saved photos and video recordings. You can download these to your local mobile device.
 Record	Take a video of the live video feed, which will be saved to the photo album.	 Playback	Review camera footage from the SD card (if installed).
 Night Mode	Smart mode: Light will turn on from movement after dark. Infrared Mode: User IR night version after dark. Colour Light Mode: Light stays on.	 PIR	Enable and select the sensitivity for PIR motion detection to receive alerts and record footage when motion is detected.
 Audible alarm	Activating light and Siren alarm during the night time when PIR motion detection to received alerts.	 Siren	Manually activate the 70-90 decibel siren* ON/OFF. 90 db is measured directly in front of the speaker, 70 db is measured at 1 metre distance.

Installation Instructions

Charging the device

1. Plug the provided DC power adaptor into a power source and use provided USB-C cable for charging. The charging indicator will be **RED** while it is charging.
2. Check battery status through the app. When it reaches 100%, the charging indicator will become solid **BLUE** and you may remove the charging cable.


Preparation

Pair your camera inside the house and ensure it is fully charged before installation. Before choosing your preferred location, check the Wi-Fi strength/coverage to ensure the camera is full functional.

Mounting

The camera can be mounted using the screws and wall plugs provided.

1. Use the mounting base or provided drill template to mark the screw positions (take into consideration where you'll have the best view).

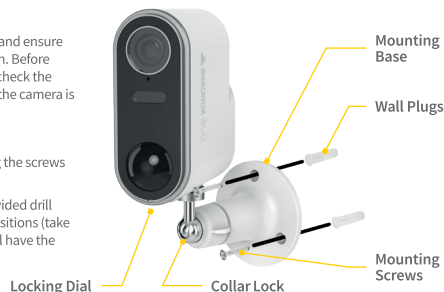









2. Drill holes and insert the provided wall plugs into the holes.
3. Use the screws to secure the mounting base in place.
4. Attach the camera to the mounting base and tighten the collar lock to hold the desired position.

Note: For ceiling/under eave mounting, ensure you navigate to settings > basic function settings > flip screen to obtain the correct orientation.

App Features

Want more from your products? The Mercator Ikuu app can help you to customise your smart products any way you like. Detailed guides on these features can be found at www.ikuu.com.au.

-  **Rooms**
Separate your products within the app for easy control based on their location.
-  **Scenes**
Control multiple products from any room at the same time.
-  **Automation**
Create triggers that allow products to complete actions automatically. These triggers can be based on time, sensors, or even other products.
-  **Routines**
Use Mercator Ikuu with other household products to create simple voice commands that trigger customised actions based on your daily activities.
-  **Timers**
Use a range of a scheduling and countdown timers that trigger actions.
-  **Alerts**
Manage the kinds of alerts you receive from your products (e.g. security products).
-  **Sharing**
Share access of your products with others.
-  **In-App Customer Service**
Talk to our customer service team directly through the app if you have any issues.

For guides on using these features in the app and to see our broad range of smart products, visit www.ikuu.com.au

You can speak to our customer service team directly via phone on **1300 552 255 (AU)** or **0800 003 329 (NZ)**, or via email at customercare@mercator.com.au



Warranty

Mercator guarantees this product against defects of materials and workmanship for a period of 36 months from the date of purchase provided the product is used for its proper purpose, in accordance with Mercator's recommendations and within such voltage and current limits as are specified by Mercator in relation to the product. Mercator will at its own option and cost make good, or replace this product with the same or similar product and return it to you, or provide a credit for any product manufactured or supplied by it, which proves to be defective within the limits set out above provided that no repairs, alterations or modifications to the product have been undertaken or attempted by anyone, other than Mercator or its authorized agents. Should you wish to make a claim under this guarantee, the product and proof of purchase must be returned pre-paid by you to the place of purchase.

This guarantee is in addition to and does not take away from any other rights and remedies you may have under any relevant law.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

Please retain your proof of purchase for all warranty claims.

For all Sales & Warranty enquiries

Mercator (ACN 005 946 958)
Caribbean Park, 36 Lakeview Dr,
Scoresby, Victoria, 3179, Australia
P.O. Box 2596,
Rowville, Victoria, 3178, Australia
For sales and product information telephone
Customer Service: 1300 552 255