



This product must be installed by a licensed electrician

## Features

- Wi-Fi (No hub required)
- Physical on/off switch
- Blue LED to indicate status
- Includes 9mm<sup>2</sup> cable entry bushing
- Suitable for ordinary or heavy-duty cord
- White, UV resistant material
- Combination head screws
- On/off control via the app
- Customizable timers & schedules via the app
- Works with both Amazon Alexa and Google Assistant
- 3 year in-home warranty




## Network/Device Requirements

Connectivity	Wi-Fi
Requirements	Existing 2.4GHz Wi-Fi network
Protocol	IEEE 802.11 b/g/n
Wireless Frequency	2.4GHz
App Requirements	Mobile device running iOS or Android. (Refer to <a href="http://ikuu.com.au">ikuu.com.au</a> for minimum specs)

## Technical Specifications

Supply Voltage	220 - 240V a.c. 50Hz
Standby Wattage	<1W
Operating Load	2400W (max)
Switched Poles	Active
IP Rating	IP20 (indoor use only)
Terminals	Caged type (connects up to 1 x 1.5 mm <sup>2</sup> for flexible cable(s))
Colour	White
Housing Material	Polycarbonate
Contact Material	Nickel plated steel
Weight	100g
Dimensions	55mm x 95mm x 40mm
Compliance / Standards	AS/NZS 3105, AS/NZS 3112, AS/NZS 3100, AS/NZS 3133, AS/NZS 4268, CISPR 32

## Terminal Diagram

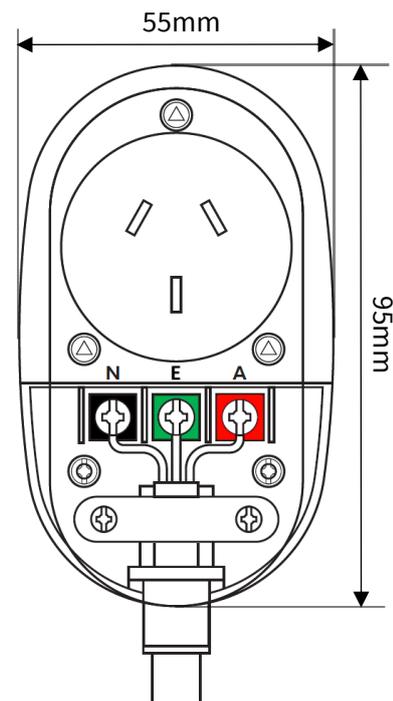

This product is valid for 3 years in-home warranty from the date of purchase. Please retain proof of purchase and certificate of compliance from the installation to make a claim. Please visit <https://www.mercator.com.au/product-support/warranty> for more information. For Mercator Ikuu contractor or end consumer support please visit [www.ikuu.com.au](http://www.ikuu.com.au) or contact our customer service team on 1300 552 255 or via email at [customercare@mercator.com.au](mailto:customercare@mercator.com.au)

\*Download the app using the QR code or visit the iOS or Google Play store.

[www.ikuu.com.au](http://www.ikuu.com.au)

