



This product must be installed by a licensed electrician

Features

- Wi-Fi (No hub required)
- No neutral wire required
- Trailing edge dimmer
- Interchangeable with most popular brands
- White LED to indicate switch status
- Includes push button
- Extra slim dial
- Combination head screws
- On/off & dimming control via the app
- Compatible with most popular brands, including 1, 2 or 3 gang
- Customizable timers & schedules via the app
- Works with both Amazon Alexa and Google Assistant
- 3 year in-home warranty




Network/Device Requirements

Connectivity	Wi-Fi BLE
Requirements	Existing 2.4GHz Wi-Fi network
Protocol	IEEE 802.11 b/g/n
Wireless Frequency	2.4GHz
App Requirements	Mobile device running iOS or Android (Refer to ikuu.com.au for minimum specs)

Technical Specifications

Neutral Required	Yes
Supply Voltage	230 - 250V a.c. 50Hz
Standby Wattage	<1W
Operating Load	LED: 5W -200W Incandescent: 5W -200W
Dimming Method	Trailing edge
Output Power	0-100% (limits set via app)
IP Rating	IP20 (Indoor use only)
Terminal Size	3.5mm ² (can fit up to 3 x 1.5mm ² wires per terminal)
Colour	White button, Yellow housing
Rear Colour	Yellow
Housing Material	Polycarbonate
Contact Material	Brass
Weight	39g
Dimensions	24mm x 40mm x 60mm
Compliance / Standards	AS/NZS 4268, AS/NZS 60669.1, AS/NZS 60669.2.1, AS/NZS 2772.2, CISPR 15, CISPR 32

Wiring Diagram

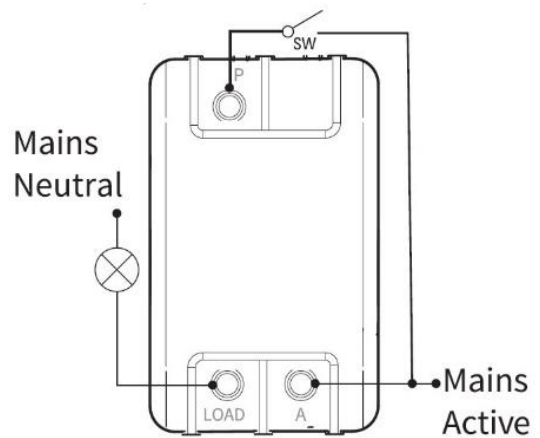

This product is valid for 3 years in-home warranty from the date of purchase. Please retain proof of purchase and certificate of compliance from the installation to make a claim. Please visit <https://www.mercator.com.au/product-support/warranty> for more information. For Mercator Ikuu contractor or end consumer support please visit www.ikuu.com.au or contact our customer service team on 1300 552 255 or via email at customercare@mercator.com.au

*Download the app using the QR code or visit the iOS or Google Play store.

www.ikuu.com.au

