



This product must be installed by a licensed electrician

## Features


- Wi-Fi (No hub required)
- Neutral wire required
- Reset button on unit
- Fits comfortably through a cut-out as small as 50mm
- White, UV resistant material
- Includes cable tie mounting holes
- On/off control via the app
- Customizable timers & schedules via the app
- Works with both Amazon Alexa and Google Assistant
- 3 year in-home warranty



## Network/Device Requirements

Connectivity	Wi-Fi
Requirements	Existing 2.4GHz Wi-Fi network
Protocol	IEEE 802.11 b/g/n
Wireless Frequency	2.4GHz
App Requirements	Mobile device running iOS or Android. (Refer to <a href="http://ikuu.com.au">ikuu.com.au</a> for minimum specs)

## Wiring Diagram

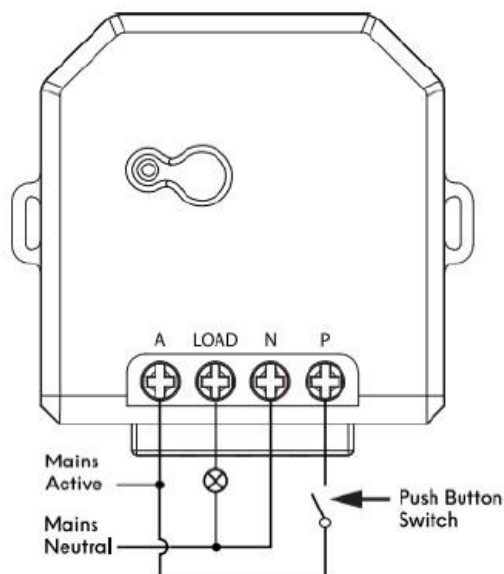

## Technical Specifications

Supply Voltage	230 - 250V a.c. 50Hz
Standby Wattage	<1W
Operating Load	LED: 300W (max) Incandescent: 500W (max)
Switched Poles	Active
IP Rating	IP20 (indoor use only)
Terminal Size	4mm <sup>2</sup> (can fit up to 2 x 1.5mm <sup>2</sup> wires per terminal)
Colour	White
Housing Material	Polycarbonate
Contact Material	Brass
Weight	42g
Dimensions	52mm x 50mm x 20mm
Compliance / Standards	AS/NZS 4268, AS/NZS 60669.1, AS/NZS 60669.2.1, CISPR 15, CISPR 32, AS/NZS 2772.2



This product is valid for 3 years in-home warranty from the date of purchase. Please retain proof of purchase and certificate of compliance from the installation to make a claim. Please visit <https://www.mercator.com.au/product-support/warranty> for more information. For Mercator Ikuü contractor or end consumer support please visit [www.ikuu.com.au](http://www.ikuu.com.au) or contact our customer service team on 1300 552 255 or via email at [customercare@mercator.com.au](mailto:customercare@mercator.com.au)

\*Download the app using the QR code or visit the iOS or Google Play store.

[www.ikuu.com.au](http://www.ikuu.com.au)

