



This product must be installed by a licensed electrician

Features


- Zigbee 3.0 compliant
- Neutral wire required
- Reset button on unit
- Fits comfortably through a cut-out as small as 50mm
- White, UV resistant material
- Includes cable tie mounting holes
- On/off control via the app
- Customizable timers & schedules via the app
- Works with both Amazon Alexa and Google Assistant
- 3 year in-home warranty



Network/Device Requirements

Connectivity	Zigbee
Requirements	Mercator Ikuü Zigbee hub
Protocol	IEEE 802.15.4
Wireless Frequency	2.4GHz
App Requirements	Mobile device running iOS or Android. (Refer to ikuu.com.au for minimum specs)

Wiring Diagram

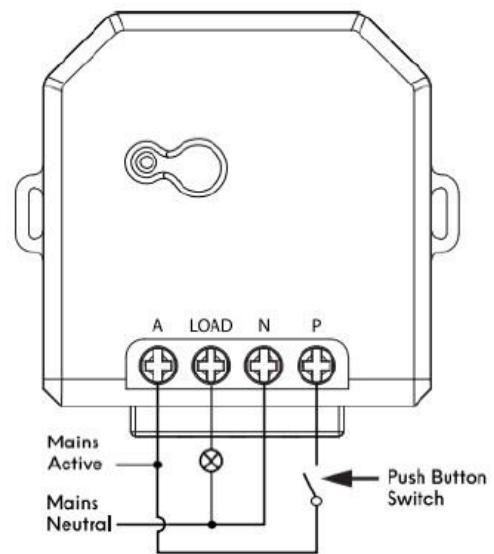

Technical Specifications

Neutral Required	Yes
Supply Voltage	230 - 250V a.c. 50Hz
Standby Wattage	<0.05W
Operating Load	LED: 300W (max) Incandescent: 500W (max)
Switched Poles	Active
IP Rating	IP20 (indoor use only)
Terminal Size	4mm ² (can fit up to 2 x 1.5mm ² wires per terminal)
Colour	White
Housing Material	Polycarbonate
Contact Material	Brass
Weight	42g
Dimensions	52mm x 50mm x 20mm
Compliance / Standards	AS/NZS 4268, AS/NZS 60669.1, AS/NZS 60669.2.1, CISPR 15, CISPR 32, AS/NZS 2772.2



This product is valid for 3 years in-home warranty from the date of purchase. Please retain proof of purchase and certificate of compliance from the installation to make a claim. Please visit <https://www.mercator.com.au/product-support/warranty> for more information. For Mercator Ikuü contractor or end consumer support please visit www.ikuu.com.au or contact our customer service team on 1300 552 255 or via email at customercare@mercator.com.au

*Download the app using the QR code or visit the iOS or Google Play store.