



This product must be installed by a licensed electrician

Features

- Zigbee 3.0 compliant
- No neutral wire required
- Reset button and brightness dial on unit
- Trailing edge dimmer. Works with most leading brand dimmable LED lights
- Fits comfortably through a cut-out as small as 50mm
- White, UV resistant material
- Includes cable tie mounting holes
- On/off & dimming control via the app
- Customizable timers & schedules via the app
- Works with both Amazon Alexa and Google Assistant
- 3 year in-home warranty




Network/Device Requirements

| | |
|--------------------|--|
| Connectivity | Zigbee |
| Requirements | Mercator Ikuü Zigbee hub |
| Protocol | IEEE 802.15.4 |
| Wireless Frequency | 2.4GHz |
| App Requirements | Mobile device running iOS or Android. (Refer to ikuu.com.au for minimum specs) |

Technical Specifications

| | |
|------------------------|--|
| Neutral Required | Yes |
| Supply Voltage | 250V a.c. 50Hz |
| Standby Wattage | <0.05W |
| Operating Load | LED: 5W – 150W Incandescent: 5W – 200W |
| Dimming Method | Trailing edge |
| Output Power | 0-100% |
| IP Rating | IP20 (indoor use only) |
| Terminal Size | 4mm ² (can fit up to 1 x 2.5mm ² wires per terminal) |
| Colour | White |
| Housing Material | Polycarbonate |
| Contact Material | Brass |
| Weight | 42g |
| Dimensions | 52mm x 50mm x 20mm |
| Compliance / Standards | AS/NZS 4268, AS/NZS 60669.1, AS/NZS 60669.2.1, CISPR 15, CISPR 32, AS/NZS 2772.2 |

Wiring Diagram

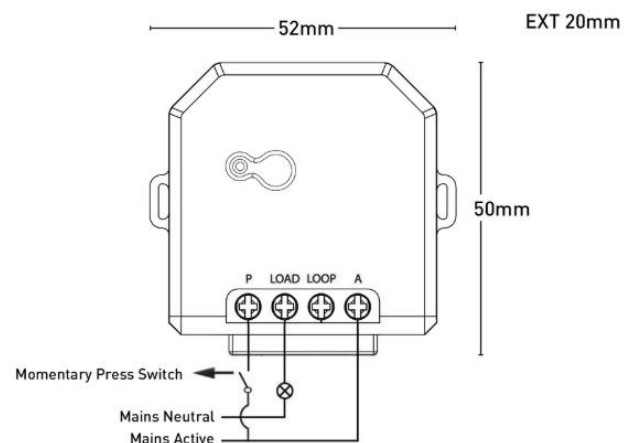

Note : A momentary press switch returns to the open position when released. If an external switch cannot be installed, leave the 'P' control terminal unconnected.

It is normal for any dimmer to produce small amounts of audible noise or buzzing. The noise may vary according to the dimmer setting. Incompatible load types: Ceiling sweep fans, exhaust fans and non-dimmable light sources



This product is valid for 3 years in-home warranty from the date of purchase. Please retain proof of purchase and certificate of compliance from the installation to make a claim. Please visit <https://www.mercator.com.au/product-support/warranty> for more information. For Mercator Ikuü contractor or end consumer support please visit www.ikuu.com.au or contact our customer service team on 1300 552 255 or via email at customercare@mercator.com.au

*Download the app using the QR code or visit the iOS or Google Play store.