




This product must be installed by a licensed electrician

Features

- Wi-Fi (No hub required)
- Neutral required
- Blue LED to indicate switch status
- Retrofit to standard mounting brackets
- White, UV resistant material
- Combination head screws
- On/off control via the app
- Customizable timers & schedules via the app
- Works with both Amazon Alexa and Google Assistant
- 3 year in-home warranty

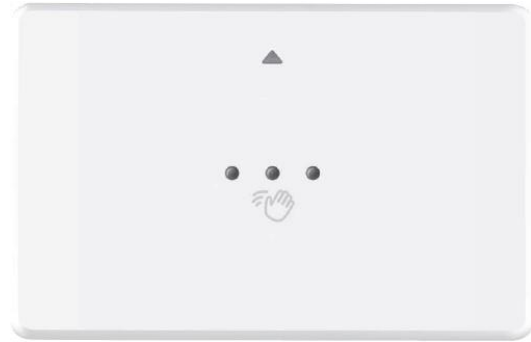


Network/Device Requirements

Connectivity	Wi-Fi
Requirements	Existing 2.4GHz Wi-Fi network
Protocol	IEEE 802.11 b/g/n
Wireless Frequency	2.4GHz
App Requirements	Mobile device running iOS or Android. (Refer to ikuu.com.au for minimum specs)

Included Accessories

Faceplate, Cut-out template, Mounting screws

Wiring Diagram

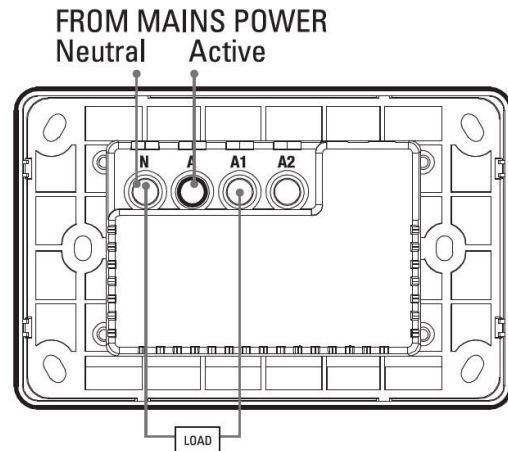

Technical Specifications

Neutral Required	Yes
Supply Voltage	230 - 250V a.c. 50Hz
Standby Wattage	<1W
Operating Load	LED: 150W Incandescent: 2500W Motor Rating: M50
IP Rating	IP20 (Indoor use only)
Terminal Size	6mm ² (can fit up to 3 x 2.5mm ² wires per terminal)
Colour	White
Rear Colour	Yellow
Housing Material	Polycarbonate
Contact Material	Brass
Weight	142g
Dimensions	115mm x 74mm x 44mm
Cut-out Dimensions	80mm x 50mm
Mounting Centres	84mm
Compliance / Standards	AS/NZS 4268, AS/NZS 60669.1, AS/NZS 60669.2.1, AS/NZS CISPR 14.1, AS CISPR 15, AS/NZS CISPR 15, AS/NZS CISPR 32

This product is valid for 3 years in-home warranty from the date of purchase. Please retain proof of purchase and certificate of compliance from the installation to make a claim. Please visit <https://www.mercator.com.au/product-support/warranty> for more information. For Mercator Ikuu contractor or end consumer support please visit www.ikuu.com.au or contact our customer service team on 1300 552 255 or via email at customercare@mercator.com.au



*Download the app using the QR code or visit the iOS or Google Play store.

