



This product must be installed by a licensed electrician

Features


- Zigbee 3.0 compliant
- Trailing edge dimmer
- Interchangeable with most popular brands
- White LED to indicate switch status
- Combination head screws
- On/off & dimming control via the app
- Customizable timers & schedules via the app
- Works with both Amazon Alexa and Google Assistant
- 3 year in-home warranty



Network/Device Requirements

Connectivity	Zigbee
Requirements	Mercator Ikuu zigbee hub
Protocol	IEEE 802.15.4
Wireless Frequency	2.4GHz
App Requirements	Mobile device running iOS or Android. (Refer to ikuu.com.au for minimum specs)


Dimensions

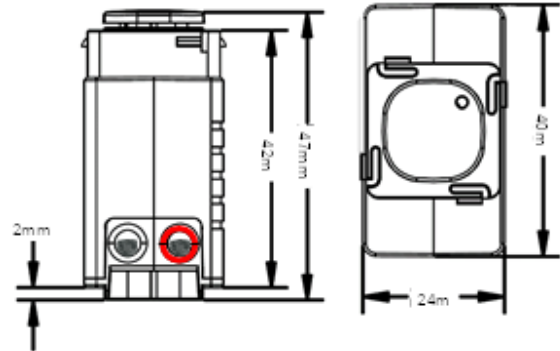

Technical Specifications

Neutral Required	No
Supply Voltage	230 - 250V a.c. 50Hz
Standby Wattage	< 1W
Operating Load	LED: 5W -250W Incandescent: 5W -250W
Dimming method	Trailing edge
Output Power	0-100% (limits set via app)
IP Rating	IP20 (Indoor use only)
Terminal Size	3.5mm ² (can fit up to 3 x 1.5mm ² wires per terminal)
Colour	White button, Yellow housing
Rear Colour	Yellow
Housing Material	Polycarbonate
Contact Material	Brass
Weight	35g
Dimensions	24mm x 40mm x 47mm
Compliance / Standards	AS/NZS 4268, AS/NZS 60669.1, AS/NZS 60669.2.1, CISPR 15, CISPR 32

Diagram

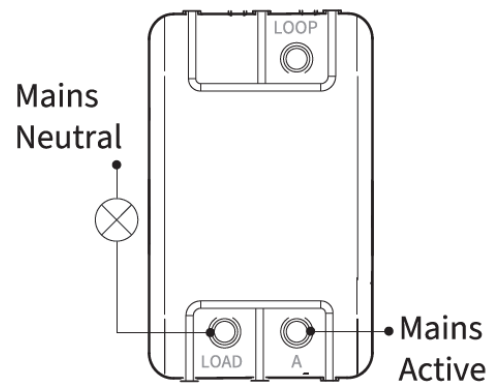

This product is valid for 3 years in-home warranty from the date of purchase. Please retain proof of purchase and certificate of compliance from the installation to make a claim. Please visit <https://www.mercator.com.au/product-support/warranty> for more information. For Mercator Ikuu contractor or end consumer support please visit www.ikuu.com.au or contact our customer service team on 1300 552 255 or via email at customercare@mercator.com.au

*Download the app using the QR code or visit the iOS or Google Play store.

