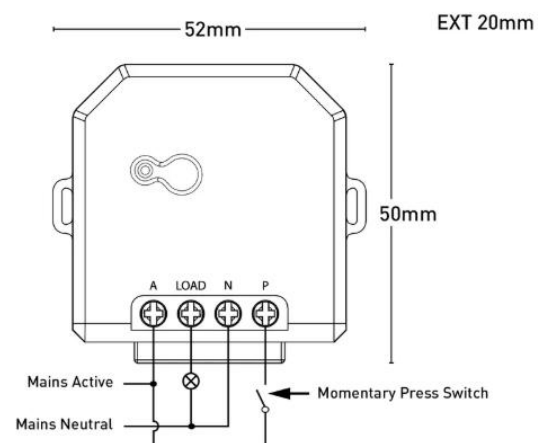## Features

- Zigbee 3.0 compliant
- Neutral wire required
- Reset button on unit
- Fits comfortably through a cut-out as small as 50mm
- White, UV resistant material
- Includes cable tie mounting holes
- On/off control via the app
- Customizable timers & schedules via the app
- Works with both Amazon Alexa and Google Assistant
- 3 year in-home warranty

Network/Device Requirements

Connectivity	Zigbee
Requirements	Mercator Ikuü Zigbee hub
Protocol	IEEE 802.15.4
Wireless Frequency	2.4GHz
App Requirements	Mobile device running iOS or Android. (Refer to ikuu.com.au for minimum specs)

Technical Specifications

Neutral Required	Yes
Supply Voltage	250V a.c. 50Hz
Standby Wattage	<0.05W
Operating Load	LED: 300W (max) Incandescent: 500W (max)
Switched Poles	Active
IP Rating	IP20 (indoor use only)
Terminal Size	4mm² (can fit up to 2 x 1.5mm² wires per terminal)
Colour	White
Housing Material	Polycarbonate
Contact Material	Brass
Weight	42g
Dimensions	52mm x 50mm x 20mm
Compliance / Standards	AS/NZS 4268, AS/NZS 60669.1, AS/NZS 60669.2.1, CISPR 15, CISPR 32, AS/NZS 2772.2

Wiring Diagram

Note : A momentary press switch returns to the open position when released. If an external switch cannot be installed, leave the 'P' control terminal unconnected.

*Download the app using the QR code or visit the iOS or Google Play store.

www.ikuu.com.au

zigbee   works with the Google Assistant   WORKS WITH amazon alexa