Features

- Zigbee 3.0 compliant
- Neutral required
- Blue LED to indicate switch status
- Retrofit to standard mounting brackets
- White, UV resistant material
- Combination head screws
- On/off control via the app
- Customizable timers & schedules via the app
- Works with both Amazon Alexa and Google Assistant
- 3 year in-home warranty
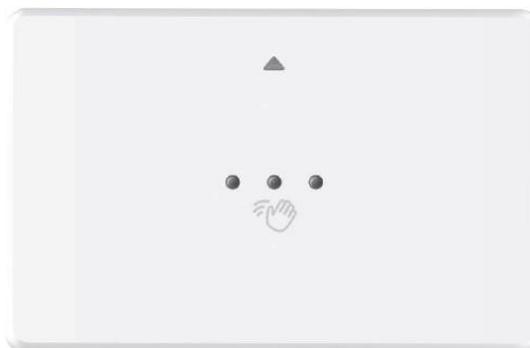
Network/Device Requirements

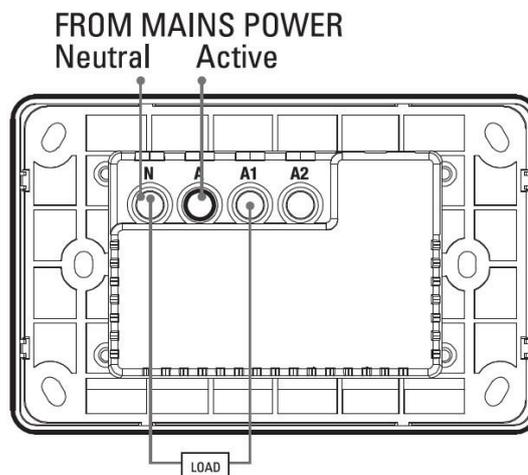|	
Connectivity	Zigbee
Requirements	Mercator Ikuü Zigbee hub
Protocol	IEEE 802.15.4
Wireless Frequency	2.4GHz
App Requirements	Mobile device running iOS or Android. (Refer to ikuu.com.au for minimum specs)

Technical Specifications

Colour	White
Neutral Required	Yes
Supply Voltage	230 - 250V a.c. 50Hz
Standby Wattage	<0.05W
Operating Load	LED: 150W Incandescent: 2500W Motor Rating: M50
IP Rating	IP20 (indoor use only)
Terminal Size	6mm² (can fit up to 3 x 2.5mm² wires per terminal)
Rear Colour	Yellow
Housing Material	Polycarbonate
Contact Material	Brass
Weight	142g
Dimensions	115mm x 74mm x 44mm
Cut-out Dimensions	80mm x 50mm
Mounting Centres	84mm
Compliance / Standards	AS/NZS 4268, AS/NZS 60669.1, AS/NZS 60669.2.1, AS CISPR 15, AS/NZS CISPR 15, AS/NZS CISPR 32

Included Accessories

Faceplate, Cut-out template, Mounting screws

Wiring Diagram

FROM MAINS POWER
Neutral   Active

N   A   A1   A2

LOAD

*Download the app using the QR code or visit the iOS or Google Play store.

www.ikuu.com.au

zigbee

works with the Google Assistant

WORKS WITH amazon alexa